



Live your life  
with LED power

**CATALOGUE 2021**  
Vol.-1



## Company Profile

BN LED LIGHTS PVT. LTD. is an ISO 9001:2015 Certified Company and one of the leading manufacturer of LED Lighting products in Gujarat. BN LED LIGHTS offers a wide product range with more than 500 different product variant for the requirement indoor, outdoor, commercial and industrial lighting to the customer.

Today, its network consist of more than 1000 professionals, more then 500 dealers, and many government offices in India. The manufacturing unit of BN LED Lights is located at Rajkot city, which is known as Hub of metal industries all over India as well its also one of the top most developing cities in India. Manufacturing unit consist of in-house R&D Department for new product development, QC Department for product quality validation, Production Department with three different production lines with latest production tools. After that Manufacturing unit has high speed SMT Machines for fast production of LED and Electronic driver board assembly, as well Laser marking machines for product branding and technical specification, and many more large and small scale machineries.

Customer satisfaction is always on the top of priorities for BN LED Lights. Under the guidelines of its founder Mr. Bhavesh Baldha (Managing Director) BN LED always focuses on serving best quality products and service to the customer, by developing new products as per market requirements, maintaining product quality, and by providing after after-sales service. Thanks to the quality of products and quicker service, it has minimum customer complains and highest customer satisfaction.

BN LED offers the same quality products for both Indian and International markets. It is committed to lighting up the world with its innovations and energy efficient solutions. Currently, over 70% of its product offering are energy efficient and manufactured in-house.

The essence of BN LED Light's success lies in the expertise of its fine team of professionals, strong relationship with associates, and the ability to adapt quickly & efficiently, coupled with the vision to always think ahead.



## Certification



ISO 9001:2015




ISO 14001:2015




CE



ROHS

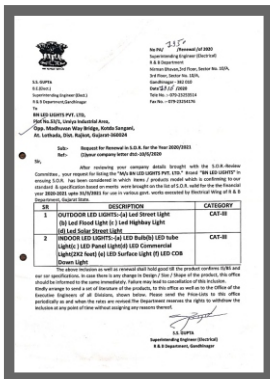

CAT-III

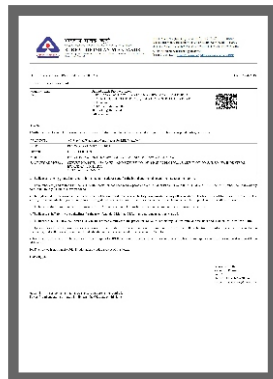

BIS




UDYAM



IEC

## Our Valuable Clients



# Contents

## Indoor Lighting

- 6 Crystal Panel Lights
- 8 Crystal Surface Lights
- 10 Prime Panel Lights
- 12 Glare Panel Lights
- 13 Glare Surface Lights
- 14 3-Step Prime Panel Lights
- 16 3-Step Glare Panel Lights
- 17 3-Step Glare Surface Lights
- 18 Joy Down Lights
- 20 Aura Down Lights
- 22 Premium Down Lights
- 24 Trim COB Lights
- 26 Button Spot Lights
- 27 Junction Spot Lights
- 28 Cylinder Surface Lights
- 29 Orbit Wall Lights
- 30 Deco LED Bulbs
- 31 Deco T-Bulbs
- 32 Square Batten Lights
- 33 Delta Bulkhead Lights
- 35 Crystal 2x2 Panel Lights

## Outdoor Lighting

- 36 Nova Street Lights
- 37 Nova Flood Lights
- 38 Royal Street Lights
- 39 Royal Flood Lights
- 40 Royal Lens Street Lights
- 41 Royal Lens Flood Lights
- 42 Capsule Street Lights
- 43 RGB Flood Lights
- 44 Opto Street Lights
- 45 Hector Flood Lights
- 46 Altima Spike Lights
- 47 Zetta Foot Lights

## Industrial Lighting

- 48 Jumer Hanging Lights
- 49 Shine Well Glass Lights
- 50 UFO High bay Lights
- 51 Fin High bay Lights




# CRYSTAL LED PANEL LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
8 W	CPLS 8W	110-240	CW / NW / WW	>800 lm
12 W	CPLS 12W	110-240	CW / NW / WW	>1200 lm
15 W	CPLS 15W	110-240	CW / NW / WW	>1500 lm
18 W	CPLS 18W	110-240	CW / NW / WW	>1800 lm
22 W	CPLS 22W	110-240	CW / NW / WW	>2200 lm


## Dimensions

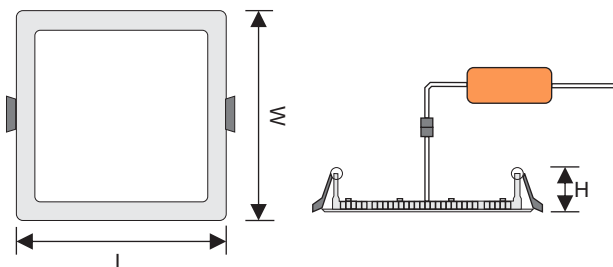

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
8 W	120 mm	120 mm	25 mm	108 x 108 mm
12 W	150 mm	150 mm	25 mm	138 x 138 mm
15 W	170 mm	170 mm	25 mm	156 x 156 mm
18 W	190 mm	190 mm	25 mm	180 x 180 mm
22 W	225 mm	125 mm	25 mm	206 x 206 mm



## Applications



\*Lumen for 6500K (CW)






## CRYSTAL LED PANEL LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
8 W	CPLR 8W	110-240	CW / NW / WW	>800 lm
12 W	CPLR 12W	110-240	CW / NW / WW	>1200 lm
15 W	CPLR 15W	110-240	CW / NW / WW	>1500 lm
18 W	CPLR 18W	110-240	CW / NW / WW	>1800 lm
22 W	CPLR 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

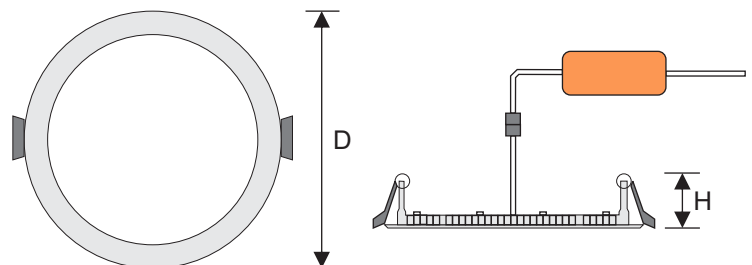

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
8 W	120 mm	25 mm	108 mm
12 W	150 mm	25 mm	138 mm
15 W	170 mm	25 mm	156 mm
18 W	190 mm	25 mm	180 mm
22 W	225 mm	25 mm	206 mm

### Applications



\*Lumen for 6500K (CW)


# CRYSTAL LED SURFACE LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
8 W	CSLS 8W	110-240	CW / NW / WW	>800 lm
12 W	CSLS 12W	110-240	CW / NW / WW	>1200 lm
15 W	CSLS 15W	110-240	CW / NW / WW	>1500 lm
18 W	CSLS 18W	110-240	CW / NW / WW	>1800 lm
22 W	CSLS 22W	110-240	CW / NW / WW	>2200 lm

## Dimensions

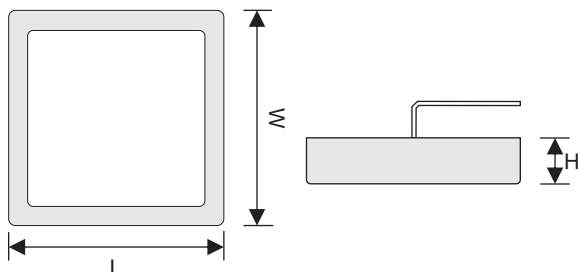

Wattage	Length (L)	Width (W)	Height (H)
8 W	120 mm	120 mm	35 mm
12 W	170 mm	170 mm	35 mm
15 W	170 mm	170 mm	35 mm
18 W	225 mm	225 mm	35 mm
22 W	225 mm	225 mm	35 mm



## Applications



\*Lumen for 6500K (CW)






## CRYSTAL LED SURFACE LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
8 W	CSLR 8W	110-240	CW / NW / WW	>800 lm
12 W	CSLR 12W	110-240	CW / NW / WW	>1200 lm
15 W	CSLR 15W	110-240	CW / NW / WW	>1500 lm
18 W	CSLR 18W	110-240	CW / NW / WW	>1800 lm
22 W	CSLR 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

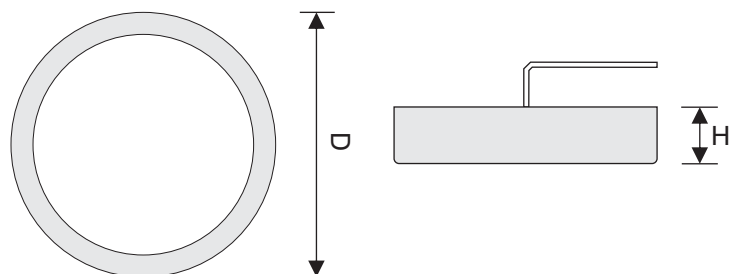

Wattage	Dia (D)	Height (H)
8 W	120 mm	35 mm
12 W	170 mm	35 mm
15 W	170 mm	35 mm
18 W	225 mm	35 mm
22 W	225 mm	55 mm

### Applications



\*Lumen for 6500K (CW)

# PRIME


## LED BACK PANEL LIGHT

Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 PC Body, slim design with low installation depth,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
6 W	PBLS 6W	110-240	CW / NW / WW	>600 lm
12 W	PBLS 12W	110-240	CW / NW / WW	>1200 lm
18 W	PBLS 18W	110-240	CW / NW / WW	>1800 lm
22 W	PBLS 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

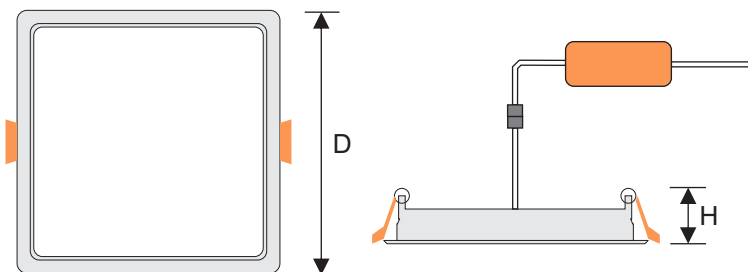

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
6 W	90 mm	90 mm	38 mm	76 x 76 mm
12 W	120 mm	120 mm	38 mm	106 x 106 mm
18 W	160 mm	160 mm	38 mm	146 x 146 mm
22 W	180 mm	180 mm	38 mm	166 x 166 mm

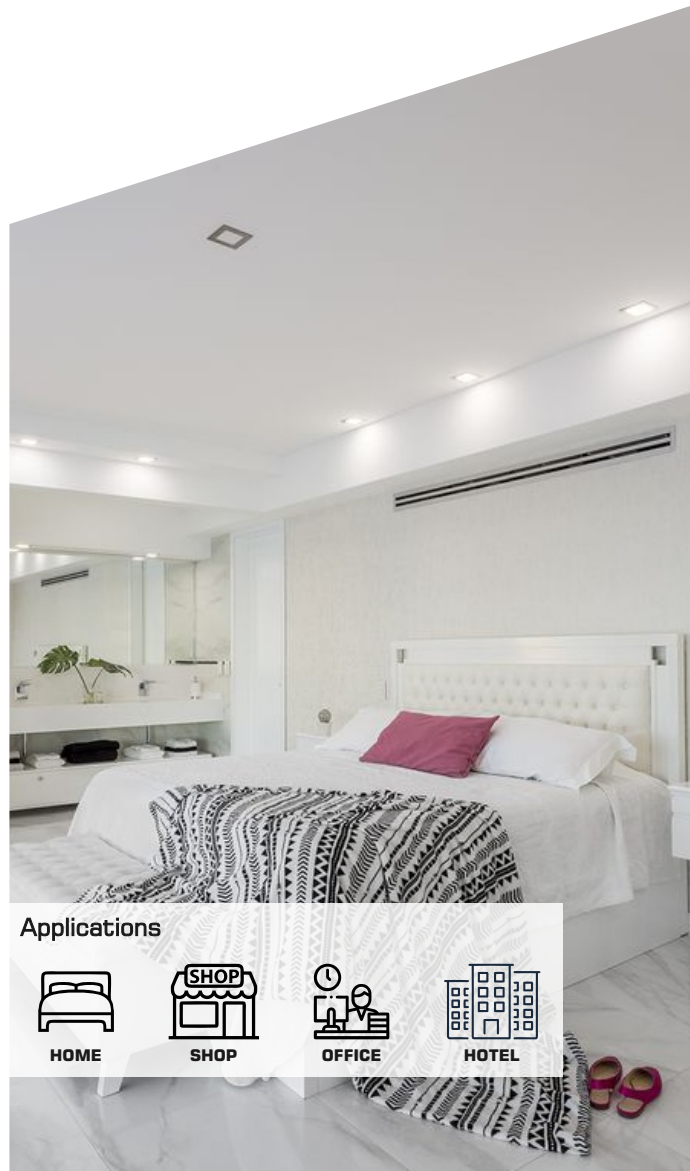

### Applications



HOME



SHOP



OFFICE



HOTEL



\*Lumen for 6500K (CW)



# PRIME LED BACK PANEL LIGHT

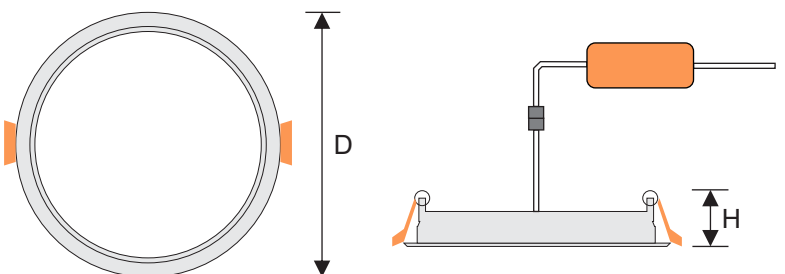


Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 PC Body, slim design with low installation depth,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
6 W	PBLR 6W	110-240	CW / NW / WW	>600 lm
12 W	PBLR 12W	110-240	CW / NW / WW	>1200 lm
18 W	PBLR 18W	110-240	CW / NW / WW	>1800 lm
22 W	PBLR 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions



Wattage	Dia (D)	Height (H)	Cut Out (Ø)
6 W	90 mm	38 mm	76 mm
12 W	120 mm	38 mm	106 mm
18 W	160 mm	38 mm	146 mm
22 W	180 mm	38 mm	166 mm

### Applications



\*Lumen for 6500K (CW)



# GLARE


## LED CONCEAL PANEL LIGHT

Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 PC Body, designed for small cutout sizes,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
6 W	GPL 6W	110-240	CW / NW / WW	>600 lm
12 W	GPL 12W	110-240	CW / NW / WW	>1200 lm
18 W	GPL 18W	110-240	CW / NW / WW	>1800 lm


### Dimensions

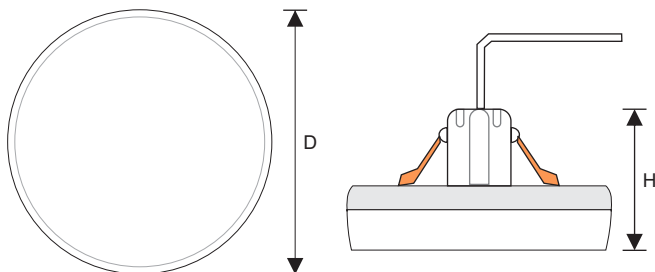

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
6 W	82 mm	64 mm	50 mm
12 W	142 mm	58 mm	88 mm
18 W	142 mm	58 mm	88 mm



### Applications



\*Lumen for 6500K (CW)



# GLARE LED SURFACE LIGHT

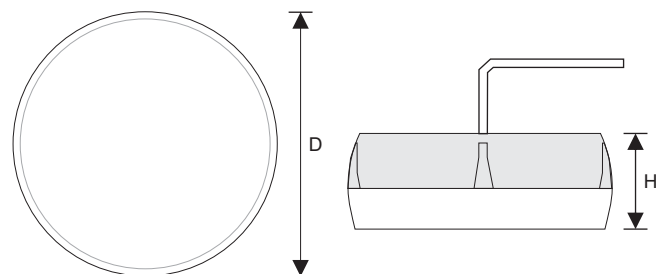


Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 PC Body with low installation height,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
6 W	GSL 6W	110-240	CW / NW / WW	>600 lm
12 W	GSL 12W	110-240	CW / NW / WW	>1200 lm
18 W	GSL 18W	110-240	CW / NW / WW	>1800 lm

## Dimensions



Wattage	Dia (D)	Height (H)
6 W	82 mm	42 mm
12 W	142 mm	46 mm
18 W	142 mm	46 mm

## Applications



HOTEL



OFFICE



SHOP



HOME



\*Lumen for 6500K (CW)






## 3-STEP PRIME LED BACK PANEL LIGHT

3 Colors in 1 Product,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, slim design with low installation depth,  
Photo biology safe,




Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
6 W	PTLS 6W	110-240	3 Colors in 1	>600 lm
12 W	PTLS 12W	110-240	3 Colors in 1	>1200 lm
18 W	PTLS 18W	110-240	3 Colors in 1	>1800 lm
22 W	PTLS 22W	110-240	3 Colors in 1	>2200 lm

### Dimensions

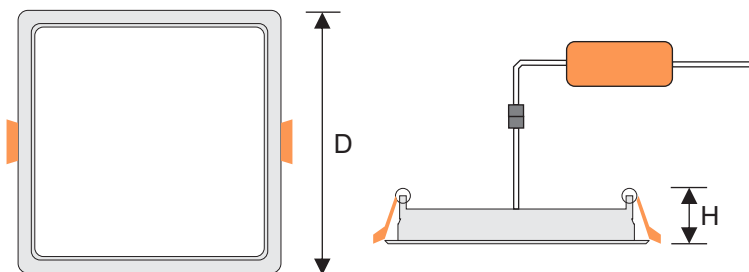

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
6 W	90 mm	90 mm	38 mm	76 x 76 mm
12 W	120 mm	120 mm	38 mm	106 x 106 mm
18 W	160 mm	160 mm	38 mm	146 x 146 mm
22 W	180 mm	180 mm	38 mm	166 x 166 mm

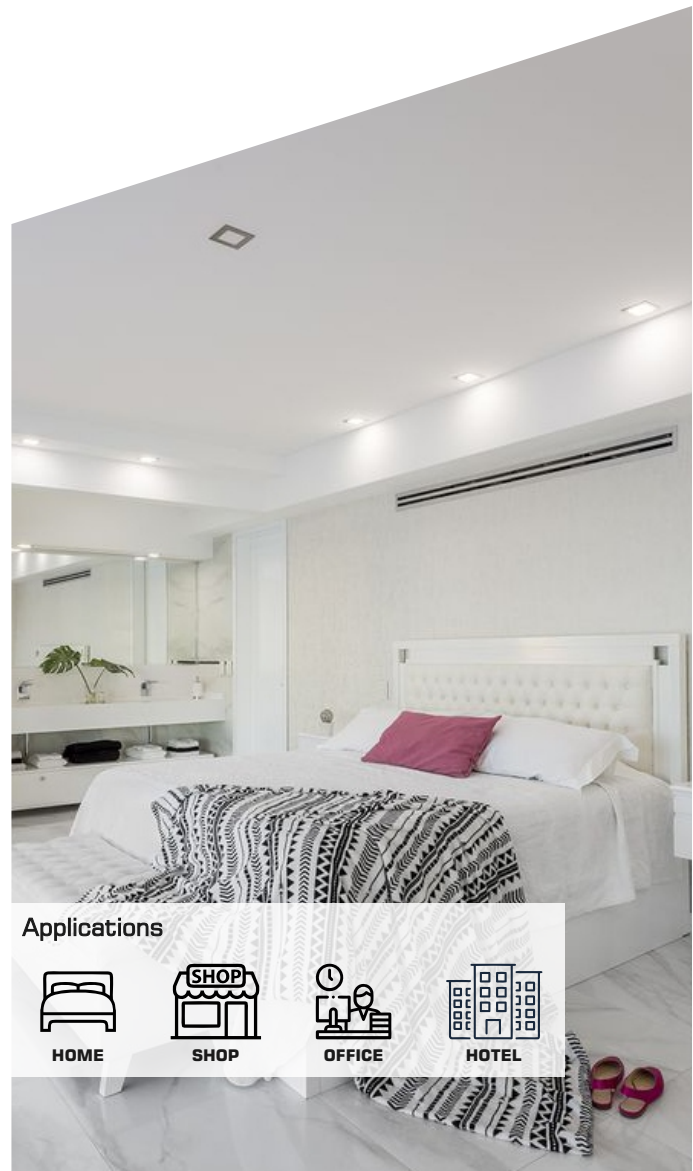

### Applications



## 3-STEP PRIME LED BACK PANEL LIGHT




3 Colors in 1 Product,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, slim design with low installation depth,  
Photo biology safe,



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
6 W	PTLR 6W	110-240	3 Colors in 1	>600 lm
12 W	PTLR 12W	110-240	3 Colors in 1	>1200 lm
18 W	PTLR 18W	110-240	3 Colors in 1	>1800 lm
22 W	PTLR 22W	110-240	3 Colors in 1	>2200 lm

### Dimensions

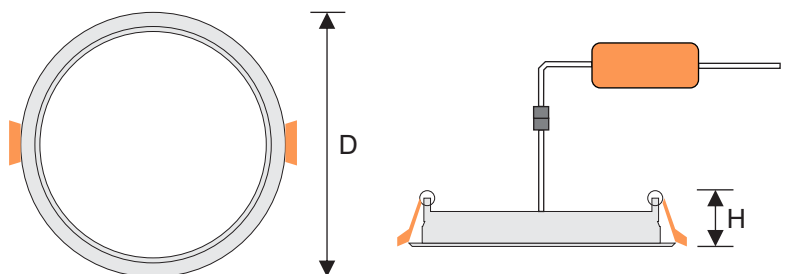

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
6 W	90 mm	38 mm	76 mm
12 W	120 mm	38 mm	106 mm
18 W	160 mm	38 mm	146 mm
22 W	180 mm	38 mm	166 mm

### Applications



HOTEL



OFFICE



SHOP



HOME



\*Lumen for 6500K (CW)




## 3-STEP GLARE LED CONCEAL PANEL LIGHT

3 Colors in 1 Product,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, designed for small cutout sizes,  
Photo biology safe,




Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
6 W	GTPL 6W	110-240	3 Colors in 1	>600 lm
12 W	GTPL 12W	110-240	3 Colors in 1	>1200 lm
18 W	GTPL 18W	110-240	3 Colors in 1	>1800 lm


### Dimensions

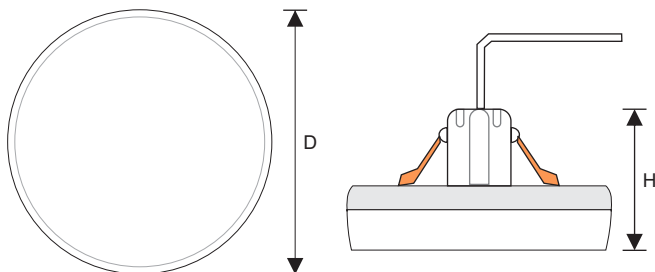

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
6 W	82 mm	64 mm	50 mm
12 W	142 mm	58 mm	88 mm
18 W	142 mm	58 mm	88 mm

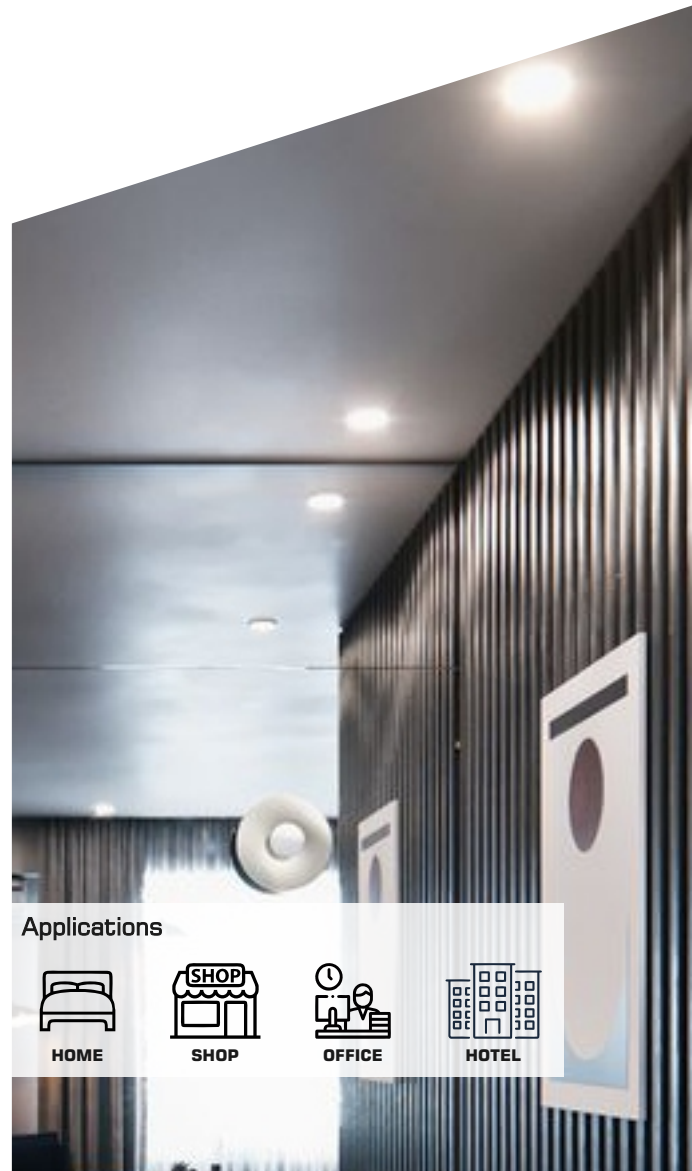

### Applications



\*Lumen for 6500K (CW)



## 3-STEP GLARE LED SURFACE LIGHT




3 Colors in 1 Product,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body with low installation height,  
Photo biology safe,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
6 W	GTSL 6W	110-240	3 Colors in 1	>600 lm
12 W	GTSL 12W	110-240	3 Colors in 1	>1200 lm
18 W	GTSL 18W	110-240	3 Colors in 1	>1800 lm

### Dimensions

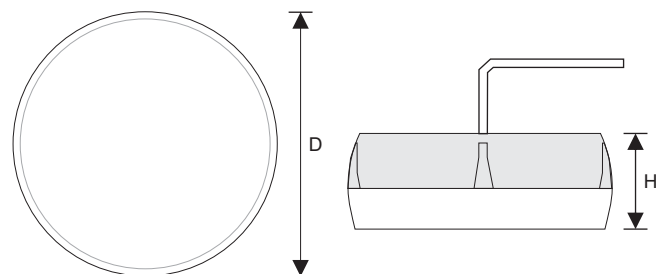

Wattage	Dia (D)	Height (H)
6 W	82 mm	42 mm
12 W	142 mm	46 mm
18 W	142 mm	46 mm

### Applications



\*Lumen for 6500K (CW)


## JOY LED DOWN LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, designed for small cutout sizes,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
10 W	JDL 10W	110-240	CW / NW / WW	>1000 lm
10 W	JDL3S 10W	110-240	3 Colors in 1	>1000 lm

### Dimensions

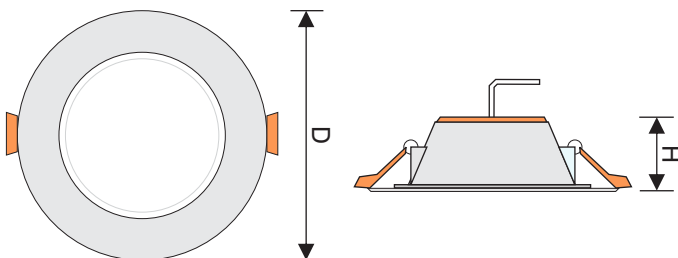

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
10 W	112 mm	48 mm	92 mm
10 W	112 mm	48 mm	92 mm

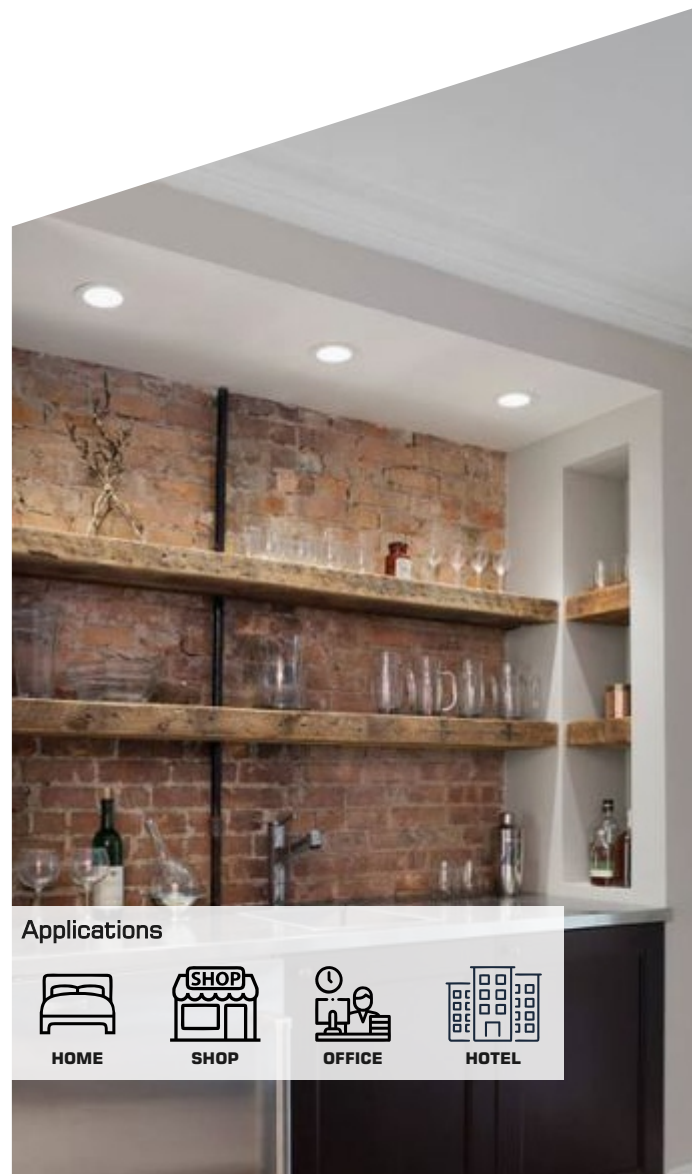

### Applications



HOME



SHOP



OFFICE



HOTEL

\*Lumen for 6500K (CW)



## JOY DEEP LED DOWN LIGHT

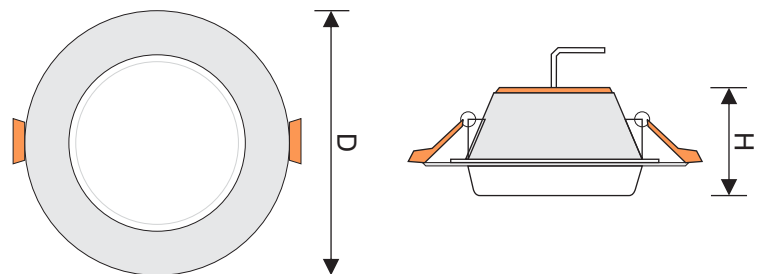


Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, slim design with low installation depth,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
10 W	JDDL 10W	110-240	CW / NW / WW	>1000 lm
10 W	JDDL3S 10W	110-240	3 Colors in 1	>1000 lm

### Dimensions



Wattage	Dia (D)	Height (H)	Cut Out (Ø)
10 W	112 mm	63 mm	92 mm
10 W	112 mm	63 mm	92 mm

### Applications



\*Lumen for 6500K (CW)



# AURA


## LED DOWN LIGHT

Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
8 W	ADLS 8W	110-240	CW / NW / WW	>800 lm
12 W	ADLS 12W	110-240	CW / NW / WW	>1200 lm
12 W	ATDLS 12W	110-240	3 Colors in 1	>1200 lm
18 W	ADLS 18W	110-240	CW / NW / WW	>1800 lm
24 W	ADLS 24W	110-240	CW / NW / WW	>2400 lm


### Dimensions

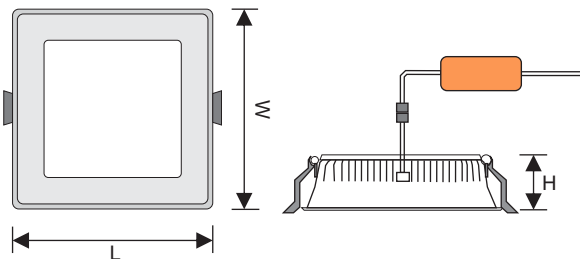

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
8 W	110 mm	110 mm	54 mm	101 x 101 mm
12 W	110 mm	110 mm	54 mm	101 x 101 mm
12 W	110 mm	110 mm	54 mm	101 x 101 mm
18 W	143 mm	143 mm	54 mm	134 x 134 mm
24 W	168 mm	168 mm	54 mm	156 x 156 mm

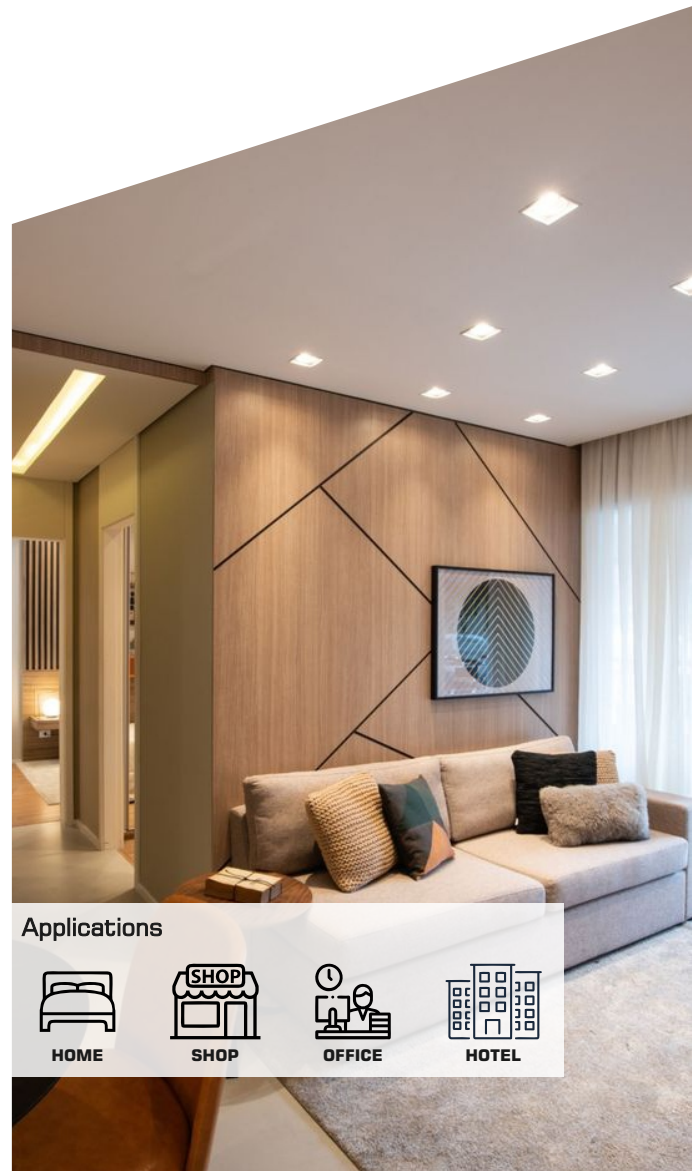

### Applications



\*Lumen for 6500K (CW)



# AURA LED DOWN LIGHT

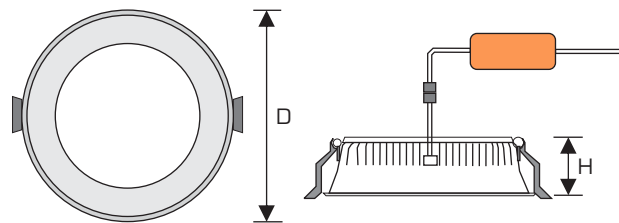


Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
8 W	ADLR 8W	110-240	CW / NW / WW	>800 lm
12 W	ADLR 12W	110-240	CW / NW / WW	>1200 lm
12 W	ATDLR12W	110-240	3 Colors in 1	>1200 lm
18 W	ADLR18W	110-240	CW / NW / WW	>1800 lm
24 W	ADLR 24W	110-240	CW / NW / WW	>2400 lm

## Dimensions



Wattage	Dia (D)	Height (H)	Cut Out (Ø)
8 W	120 mm	54 mm	112 mm
12 W	120 mm	54 mm	112 mm
12 W	120 mm	54 mm	112 mm
18 W	148 mm	54 mm	140 mm
24 W	170 mm	54 mm	162 mm

## Applications



HOTEL



OFFICE



SHOP



HOME



\*Lumen for 6500K (CW)








## PREMIUM LED DOWN LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
5 W	SDLP 5W	110-240	CW / NW / WW	>500 lm
8 W	SDLP 8W	110-240	CW / NW / WW	>800 lm
12 W	SDLP 12W	110-240	CW / NW / WW	>1200 lm
16 W	SDLP 16W	110-240	CW / NW / WW	>1600 lm
22 W	SDLP 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

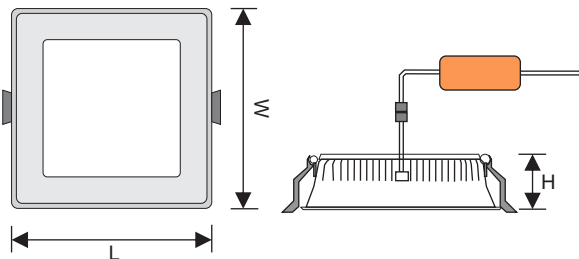

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
5 W	92 mm	92 mm	43 mm	84 x 84 mm
8 W	92 mm	92 mm	43 mm	84 x 84 mm
12 W	134 mm	134 mm	48 mm	122 x 122 mm
16 W	160 mm	160 mm	48 mm	143 x 143 mm
22 W	194 mm	194 mm	56 mm	167 x 167 mm



### Applications



HOME



SHOP



OFFICE



HOTEL

\*Lumen for 6500K (CW)






## PREMIUM LED DOWN LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
5 W	RDLR 5W	110-240	CW / NW / WW	>500 lm
8 W	RDLR 8W	110-240	CW / NW / WW	>800 lm
12 W	RDLR12W	110-240	CW / NW / WW	>1200 lm
16 W	RDLR16W	110-240	CW / NW / WW	>1600 lm
22 W	RDLR 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

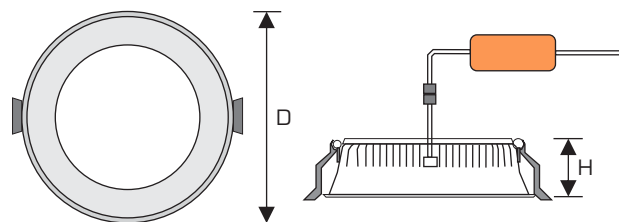

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
5 W	92 mm	43 mm	84 mm
8 W	92 mm	43 mm	84 mm
12 W	120 mm	48 mm	112 mm
16 W	152 mm	48 mm	142 mm
22 W	182 mm	56 mm	164 mm

### Applications



\*Lumen for 6500K (CW)


## TRIM CURVE COB LED SPOT LIGHT

Sharp beam lighting  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
Philips LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
7 W	TCSL 7W	110-240	CW / NW / WW	>850 lm
12 W	TCSL 12W	110-240	CW / NW / WW	>1450 lm
18 W	TCSL 18W	110-240	CW / NW / WW	>2150 lm

### Dimensions

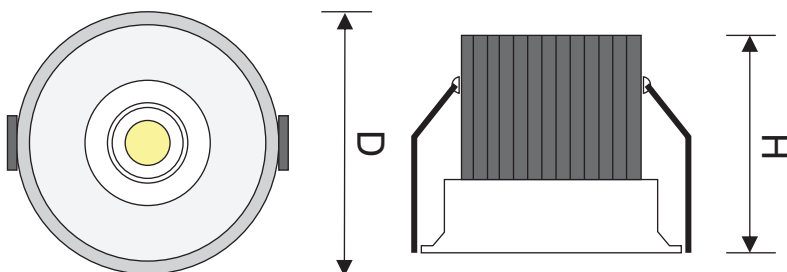

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
7 W	75 mm	58 mm	60 mm
12 W	84 mm	66 mm	70 mm
18 W	95 mm	78 mm	75 mm



### Applications



\*Lumen for 6500K (CW)





## TRIM VALUE COB LED SPOT LIGHT




Sharp beam lighting,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
Philips LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
7 W	TVSL 7W	110-240	CW / NW / WW	>850 lm
12 W	TVSL 12W	110-240	CW / NW / WW	>1450 lm
18 W	TVSL 18W	110-240	CW / NW / WW	>2150 lm

### Dimensions

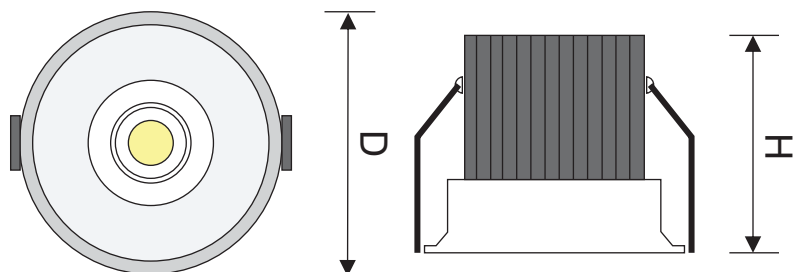

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
7 W	75 mm	65 mm	65 mm
12 W	84 mm	74 mm	74 mm
18 W	95 mm	92 mm	84 mm

### Applications



\*Lumen for 6500K (CW)




# BUTTON LED SPOT LIGHT

Sharp beam lighting  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 PC Body, slim design with low installation depth,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
2 W	RBL 2W	110-240	CW / NW / WW	>200 lm
2 W	SBL 2W	110-240	CW / NW / WW	>200 lm
3 W	RBL 3W	110-240	CW / NW / WW	>300 lm

## Dimensions

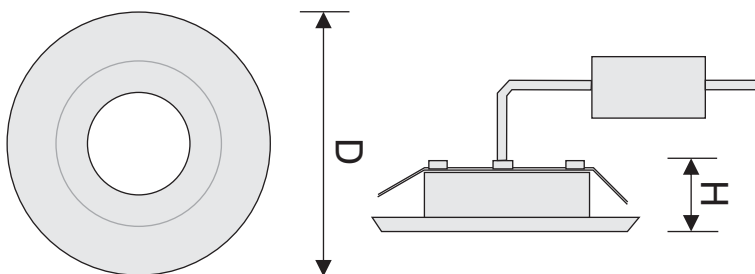

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
2 W	42 mm	16 mm	36 mm
2 W	42 mm	16 mm	36 mm
3 W	64 mm	28 mm	55 mm

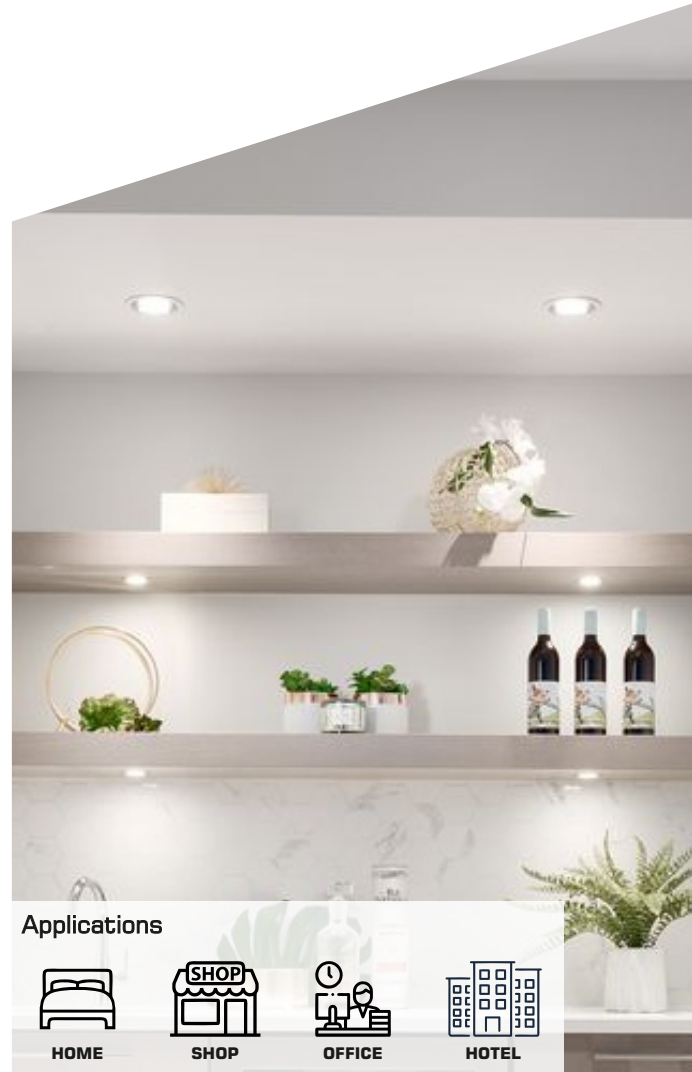

## Applications



HOME



SHOP



OFFICE



HOTEL

\*Same Dia & LxW for SBL2W  
 \*Lumen for 6500K (CW)



## JUNCTION LED SPOT LIGHT




Sharp beam lighting,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
Philips LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, slim design with low installation depth,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
4 W	AJL 4W	110-240	CW / NW / WW	>400 lm
4 W	PLJL 4W	110-240	CW / NW / WW	>400 lm
4 W	PHJL 4W	110-240	CW / NW / WW	>400 lm

### Dimensions

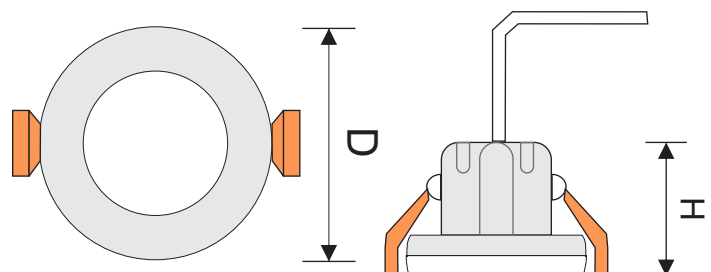

Wattage	Dia (D)	Height (H)	Cut Out (Ø)
4 W	70 mm	28 mm	60 mm
4 W	72 mm	38 mm	50 mm
4 W	80 mm	45 mm	60 mm

### Applications



\*Lumen for 6500K (CW)






## CYLINDER LED SURFACE LIGHT

Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Color (CCT)	Lumens
5 W	CDLR 5W	110-240	CW / NW / WW	>500 lm
8 W	CDLR 8W	110-240	CW / NW / WW	>800 lm
12 W	CDLR 12W	110-240	CW / NW / WW	>1200 lm
16 W	CDLR 16W	110-240	CW / NW / WW	>1600 lm
22 W	CDLR 22W	110-240	CW / NW / WW	>2200 lm

### Dimensions

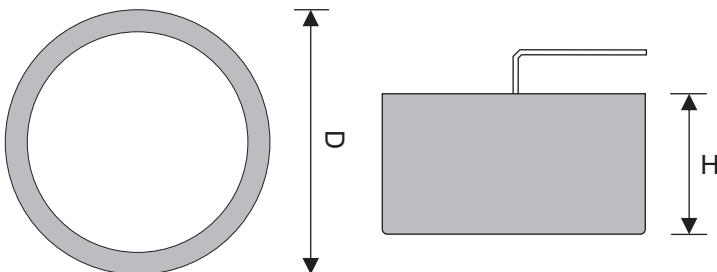

Wattage	Dia (D)	Height (H)
5 W	82 mm	70 mm
8 W	82 mm	70 mm
12 W	110 mm	75 mm
16 W	138 mm	80 mm
22 W	160 mm	85 mm

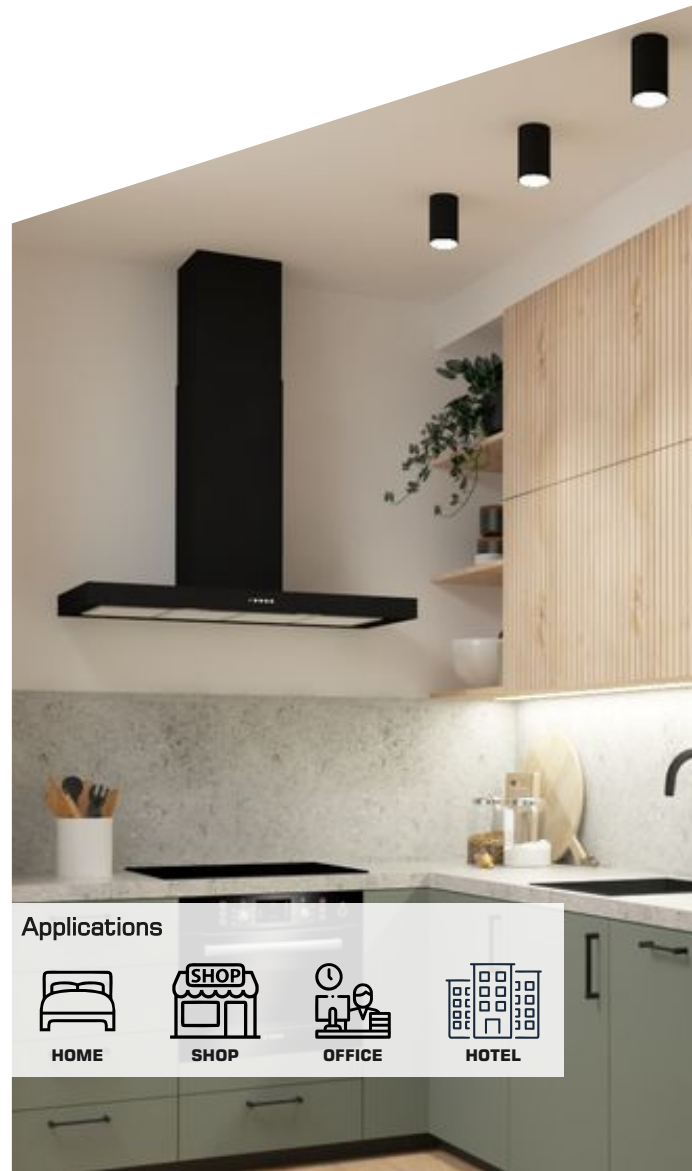

### Applications



HOME



SHOP



OFFICE



HOTEL



# ORBIT LED WALL LIGHT

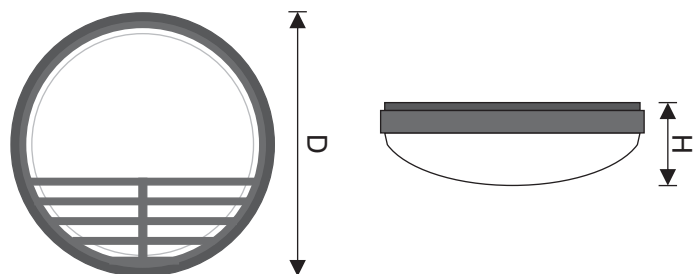


Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body with low installation height,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
12 W	OWLP 12W	110-240	CW / NW / WW	>1200 lm
12 W	OWLG 12W	110-240	CW / NW / WW	>1200 lm
18 W	OWLP 18W	110-240	CW / NW / WW	>1800 lm
18 W	OWLG 18W	110-240	CW / NW / WW	>1800 lm

## Dimensions



Wattage	Dia (D)	Height (H)
12 W	175 mm	60 mm
12 W	175 mm	60 mm
18 W	210 mm	62 mm
18 W	210 mm	62 mm

## Applications



\*Lumen for 6500K (CW)




## DECO LED BULB

Available in B22, E27 Base,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Heat sink for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
0.5 W	DBL 05W	110-240	CW / NW / WW	>50 lm
5 W	DBL 5W	110-240	CW / NW / WW	>500 lm
7 W	DBL 7W	110-240	CW / NW / WW	>700 lm
9 W	DBL 9W	110-240	CW / NW / WW	>900 lm
12 W	DBL 12W	110-240	CW / NW / WW	>1200 lm
15 W	DBL 15W	110-240	CW / NW / WW	>1500 lm
20 W	DBL 20W	110-240	CW / NW / WW	>2000 lm
30 W	DBL 30W	110-240	CW / NW / WW	>3000 lm
45 W	DBL 45W	110-240	CW / NW / WW	>4500 lm

### Dimensions

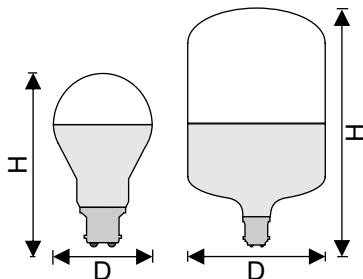

Wattage	Dia (D)	Height (H)
0.5 W	30 mm	50 mm
5-9 W	57 mm	100 mm
12-15 W	65 mm	120 mm
20 W	70 mm	140 mm
30 W	100 mm	180 mm
45 W	120 mm	235 mm



### Applications



HOME



SHOP



OFFICE



HOTEL

\*Lumen for 6500K (CW)



## DECO LED T-BULB



Available in B22, E27 Base,

High luminous efficacy,

Lm80 tested LED Technology for long Life span,

High Performance LED Driver,

Power Factor > 0.9,

Thd < 15%,

T Shaped Design in PC Body material for more coverage area,

Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
12 W	DTB 12W	110-240	CW / NW / WW	>1200 lm
12 W	DTB3S 12W	110-240	3 Colors in 1	>1200 lm



### Applications



HOTEL




OFFICE



SHOP



HOME

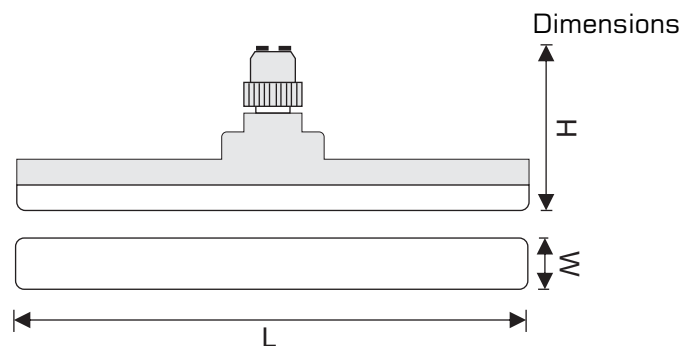

Wattage	Length (L)	Width (W)	Height (H)
12 W	200 mm	106 mm	30 mm



\*Lumen for 6500K (CW)




# SQUARE LED BATTENS

- Photo biology safe,
- High luminous efficacy,
- Lm80 tested LED Technology for long Life span,
- High Performance LED Driver,
- Power Factor > 0.9,
- Thd < 15%,
- PC and Aluminium Body,
- Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
6 W	STLP 6W	110-240	CW / NW / WW	>600 lm
10 W	STLP 10W	110-240	CW / NW / WW	>1000 lm
20 W	STLP 20W	110-240	CW / NW / WW	>2000 lm
22 W	STLP 22W	110-240	CW / NW / WW	>2200 lm
36 W	STLA 36W	110-240	CW / NW / WW	>3600 lm
40 W	STLA 40W	110-240	CW / NW / WW	>4000 lm

## Dimensions

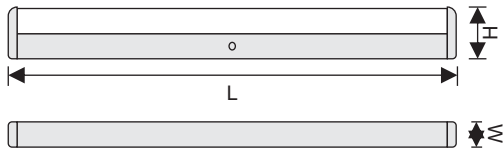

Wattage	Length (L)	Width (W)	Height (H)
6 W	268 mm	22 mm	38 mm
10 W	530 mm	22 mm	38 mm
20 W	1175 mm	22 mm	38 mm
22 W	1175 mm	22 mm	38 mm
36 W	1205 mm	30 mm	36 mm
40 W	1205 mm	30 mm	36 mm



## Applications



HOME



SHOP



OFFICE



HOTEL

\*Lumen for 6500K (CW)



## DELTA LED BULKHEAD LIGHT

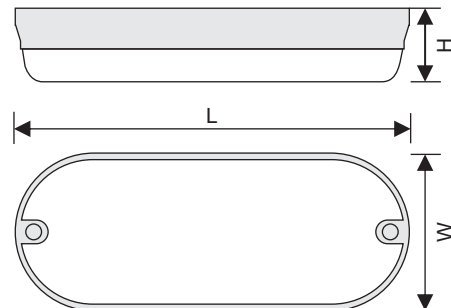


Photo biology safe,  
High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
PC Body, slim design with low installation depth,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
12 W	DBH 12W	110-240	CW / NW / WW	>1200 lm
18 W	DBH 18W	110-240	CW / NW / WW	>1800 lm

### Dimensions



Wattage	Length (L)	Width (W)	Height (H)
12 W	170 mm	70 mm	45 mm
18 W	210 mm	100 mm	60 mm

### Applications



\*Lumen for 6500K (CW)

# SIGMA


## LED RECTANGLE PANEL LIGHT

Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,




Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
18 W	SPLS 18W	110-240	CW / NW / WW	>1800 lm
36 W	SPLS 36W	110-240	CW / NW / WW	>3600 lm


### Dimensions

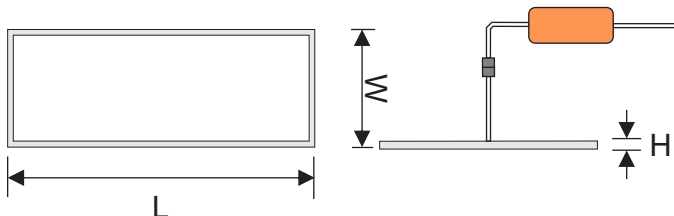

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
18 W	295 mm	295 mm	25 mm	295 x 295 mm
36 W	295 mm	1190 mm	25 mm	1190 x 1190 mm

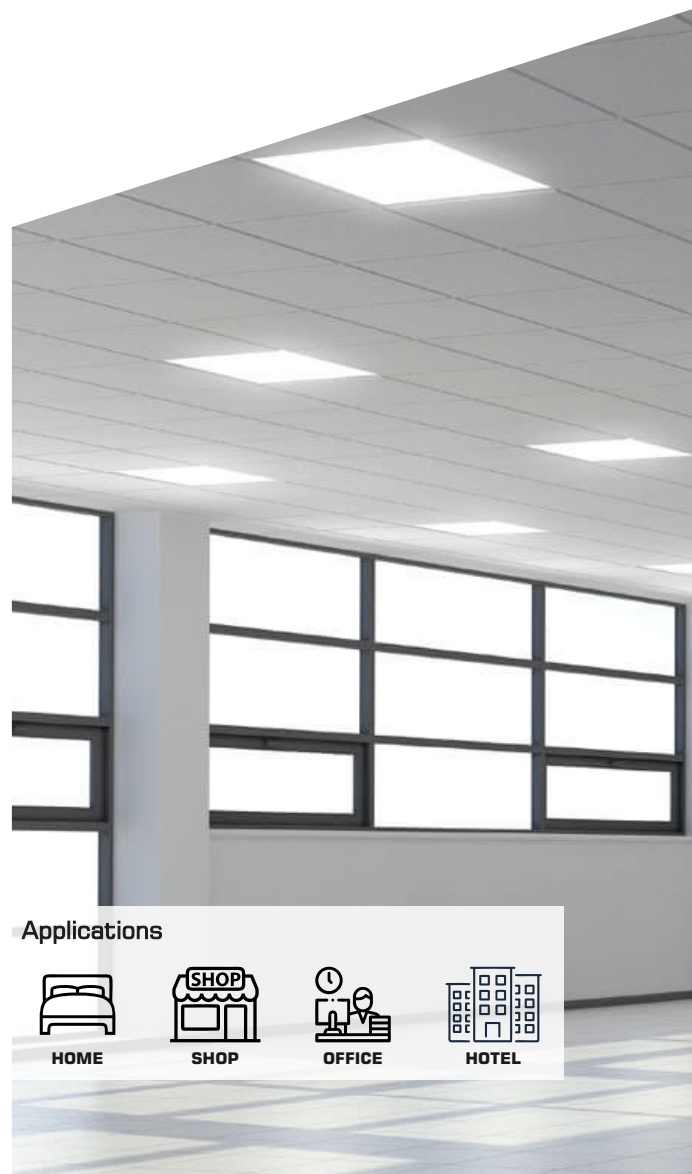

### Applications



\*Lumen for 6500K (CW)






# SIGMA LED SQUARE PANEL LIGHT



Photo biology safe,  
 High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
36 W	CPLS 36W	110-240	CW / NW / WW	>3600 lm
40 W	CPLS 40W	110-240	CW / NW / WW	>4000 lm

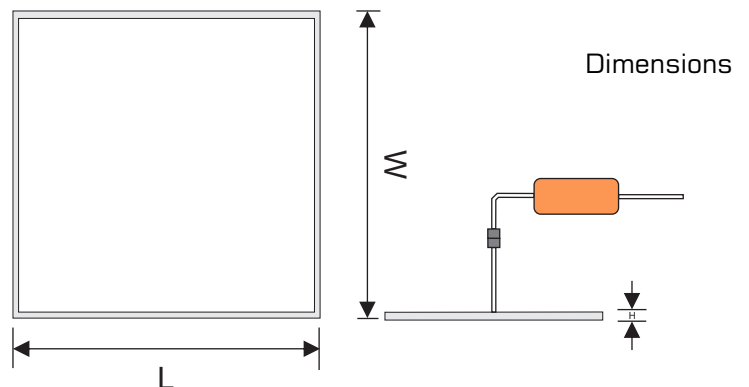

Wattage	Length (L)	Width (W)	Height (H)	Cut Out (LxW)
36 W	595 mm	595 mm	10 mm	595 x 595 mm
40 W	595 mm	595 mm	10 mm	595 x 595 mm

### Applications



\*Lumen for 6500K (CW)







# NOVA


## LED STREET LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
15 W	SLN 15 W	110-240	CW / NW / WW	>1500 lm
25 W	SLN 25 W	110-240	CW / NW / WW	>2500 lm
35 W	SLN 35 W	110-240	CW / NW / WW	>3500 lm
50 W	SLN 50 W	110-240	CW / NW / WW	>5000 lm
60 W	SLN 60 W	110-240	CW / NW / WW	>6000 lm
72 W	SLN 72 W	110-240	CW / NW / WW	>7200 lm
100 W	SLN 100 W	110-240	CW / NW / WW	>10000 lm
120 W	SLN 120 W	110-240	CW / NW / WW	>12000 lm
150 W	SLN 150 W	110-240	CW / NW / WW	>15000 lm
180 W	SLN 200 W	110-240	CW / NW / WW	>20000 lm

### Dimensions

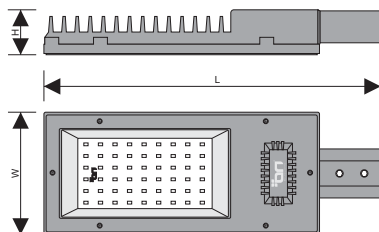

Wattage	Length (L)	Width (W)	Height (H)	Pipe Dia (Ø)
15-25 W	335 mm	114 mm	62 mm	42 mm
35-60 W	350 mm	150 mm	78 mm	40 mm
72-120 W	422 mm	196 mm	88 mm	52 mm
150-180 W	502 mm	250 mm	92 mm	54 mm



### Applications



ROAD LIGHTING

\*Lumen for 6500K (CW)



# NOVA LED FLOOD LIGHT




High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium Body for better thermal management,  
Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
10 W	FLN 10 W	110-240	CW / NW / WW	>1000 lm
20 W	FLN 20 W	110-240	CW / NW / WW	>2000 lm
30 W	FLN 30 W	110-240	CW / NW / WW	>3000 lm
50 W	FLN 50 W	110-240	CW / NW / WW	>5000 lm
60 W	FLN 60 W	110-240	CW / NW / WW	>6000 lm
72 W	FLN 72 W	110-240	CW / NW / WW	>7200 lm
100 W	FLN 100 W	110-240	CW / NW / WW	>10000 lm
120 W	FLN 120 W	110-240	CW / NW / WW	>12000 lm
150 W	FLN 150 W	110-240	CW / NW / WW	>15000 lm
200 W	FLN 200 W	110-240	CW / NW / WW	>20000 lm
250 W	FLN 250 W	110-240	CW / NW / WW	>25000 lm

## Dimensions

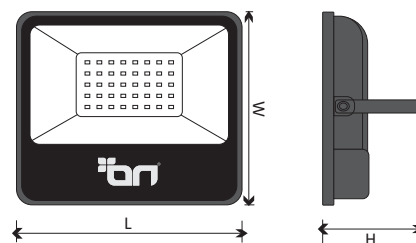

Wattage	Length (L)	Width (W)	Height (H)
10 W	136 mm	116 mm	110 mm
20-30 W	185 mm	180 mm	110 mm
50-60 W	225 mm	220 mm	140 mm
72-100 W	285 mm	275 mm	175 mm
120-150 W	290 mm	290 mm	205 mm
200 W	345 mm	325 mm	255 mm
250 W	415 mm	370 mm	275 mm

## Applications



STADIUM



STORAGE AREA



GARDEN



INDUSTRIES



\*Lumen for 6500K (CW)




## ROYAL LED STREET LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
15 W	SLU 15 W	110-240	CW / NW / WW	>1500 lm
25 W	SLU 25 W	110-240	CW / NW / WW	>2500 lm
35 W	SLU 35 W	110-240	CW / NW / WW	>3500 lm
35 W	SLR 35 W	110-240	CW / NW / WW	>3500 lm
50 W	SLR 50 W	110-240	CW / NW / WW	>5000 lm
60 W	SLR 60 W	110-240	CW / NW / WW	>6000 lm
72 W	SLR 72 W	110-240	CW / NW / WW	>7200 lm
100 W	SLR 100 W	110-240	CW / NW / WW	>10000 lm
120 W	SLR 120 W	110-240	CW / NW / WW	>12000 lm

### Dimensions

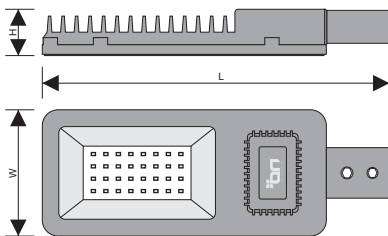

Wattage	Length (L)	Width (W)	Height (H)	Pipe Dia (Ø)
15 W	330 mm	112 mm	55 mm	42 mm
25 W	355 mm	135 mm	55 mm	42 mm
35 W	355 mm	135 mm	65 mm	42 mm
50 W	400 mm	186 mm	82 mm	54 mm
60 W	400 mm	186 mm	82 mm	54 mm
72 W	400 mm	186 mm	82 mm	54 mm
100 W	455 mm	225 mm	82 mm	54 mm
120 W	455 mm	225 mm	82 mm	54 mm



### Applications



\*Lumen for 6500K (CW)



# ROYAL LED FLOOD LIGHT




High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
18 W	FLR 18W	110-240	CW / NW / WW	>1800 lm
36 W	FLN 36W	110-240	CW / NW / WW	>3600 lm
50 W	FLN 50W	110-240	CW / NW / WW	>5000 lm
60 W	FLN 60W	110-240	CW / NW / WW	>6000 lm
72 W	FLN 72 W	110-240	CW / NW / WW	>7200 lm
100 W	FLN 100 W	110-240	CW / NW / WW	>10000 lm
150 W	FLN 150 W	110-240	CW / NW / WW	>15000 lm
200 W	FLN 200 W	110-240	CW / NW / WW	>20000 lm
300 W	FLN 300 W	110-240	CW / NW / WW	>30000 lm
400 W	FLN 400 W	110-240	CW / NW / WW	>40000 lm

## Dimensions

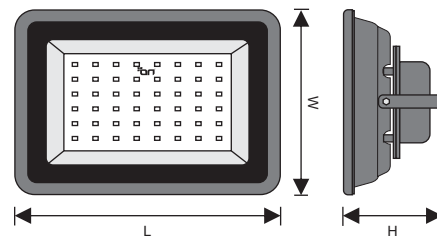

Wattage	Length (L)	Width (W)	Height (H)
18 W	158 mm	105 mm	100 mm
36 W	210 mm	155 mm	125 mm
50 W	260 mm	200 mm	155 mm
60-72 W	300 mm	245 mm	185 mm
100 W	325 mm	245 mm	185 mm
150-200 W	375 mm	285 mm	195 mm
300 W	485 mm	350 mm	235 mm
400 W	600 mm	400 mm	265 mm

## Applications



STADIUM



STORAGE AREA



GARDEN



INDUSTRIES



\*Lumen for 6500K (CW)






## ROYAL LENS LED STREET LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: Red, Green, Blue, Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
25 W	SLRL 25 W	110-240	CW / NW / WW	>2500 lm
35 W	SLRL 35 W	110-240	CW / NW / WW	>3500 lm
50 W	SLRL 50 W	110-240	CW / NW / WW	>5000 lm
72 W	SLRL 72 W	110-240	CW / NW / WW	>7200 lm
100 W	SLRL 100 W	110-240	CW / NW / WW	>10000 lm
120 W	SLRL 120 W	110-240	CW / NW / WW	>12000 lm
150 W	SLRL 150 W	110-240	CW / NW / WW	>15000 lm

### Dimensions

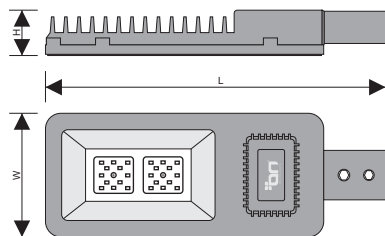

Wattage	Length (L)	Width (W)	Height (H)	Pipe Dia (Ø)
25 W	355 mm	135 mm	55 mm	42 mm
35 W	355 mm	135 mm	65 mm	42 mm
50 W	400 mm	186 mm	82 mm	54 mm
72 W	400 mm	186 mm	82 mm	54 mm
100 W	455 mm	225 mm	82 mm	54 mm
120 W	455 mm	225 mm	82 mm	54 mm
150 W	455 mm	225 mm	82 mm	54 mm



### Applications



\*Lumen for 6500K (CW)





## ROYAL LENS LED FLOOD LIGHT




High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium body for better thermal management,  
Available Color options: CW, WW



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
50 W	FLRL 50W	110-240	CW / WW	>6000 lm
100 W	FLRL 100W	110-240	CW / WW	>12000 lm
150 W	FLRL 150W	110-240	CW / WW	>18000 lm
200 W	FLRL 200W	110-240	CW / WW	>24000 lm
300 W	FLRL 300W	110-240	CW / WW	>36000 lm
400 W	FLRL 400W	110-240	CW / WW	>48000 lm

### Dimensions

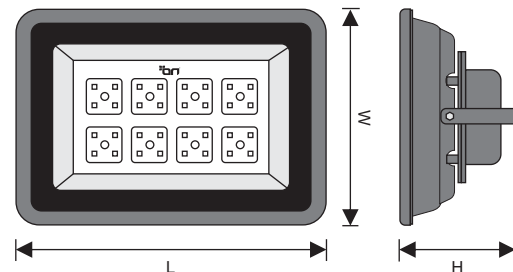

Wattage	Length (L)	Width (W)	Height (H)
50 W	260 mm	200 mm	155 mm
100 W	325 mm	245 mm	185 mm
150 W	375 mm	285 mm	195 mm
200 W	375 mm	285 mm	195 mm
300 W	485 mm	350 mm	235 mm
400 W	600 mm	400 mm	265 mm

### Applications



STADIUM



STORAGE AREA



GARDEN



INDUSTRIES



\*Lumen for 6500K (CW)








## CAPSULE LED STREET LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
20 W	SLC 20 W	110-240	CW / NW / WW	>2000 lm
30 W	SLC 30 W	110-240	CW / NW / WW	>3000 lm
50 W	SLC 50 W	110-240	CW / NW / WW	>5000 lm

### Dimensions

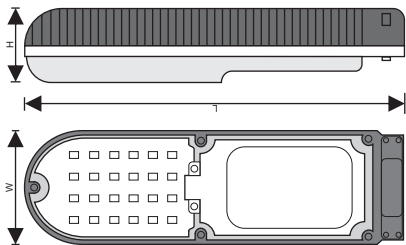

Wattage	Length (L)	Width (W)	Height (H)	Pipe Dia (Ø)
20 W	280 mm	80 mm	65 mm	38 mm
30 W	325 mm	80 mm	65 mm	38 mm
50 W	400 mm	125 mm	90 mm	54 mm



### Applications




\*Lumen for 6500K (CW)



# RGB LED FLOOD LIGHT




High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management  
 Multiple Mode color options by remote controller

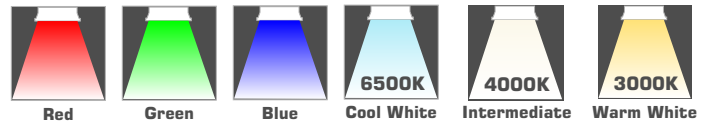

Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
50 W	RGB 50W	110-240	Multi Color	>5000 lm
100 W	RGB 100W	110-240	Multi Color	>10000 lm

## Dimensions

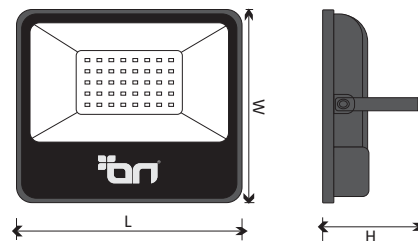

Wattage	Length (L)	Width (W)	Height (H)
50 W	225 mm	220 mm	140 mm
100 W	285 mm	275 mm	175 mm

## Applications



\*Lumen for 6500K (CW)










## OPTO LED STREET LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
20 W	SLO 20 W	110-240	CW / NW / WW	>2000 lm
30 W	SLO 30 W	110-240	CW / NW / WW	>3000 lm
50 W	SLO 50 W	110-240	CW / NW / WW	>5000 lm
100 W	SLO 100 W	110-240	CW / NW / WW	>10000 lm

### Dimensions

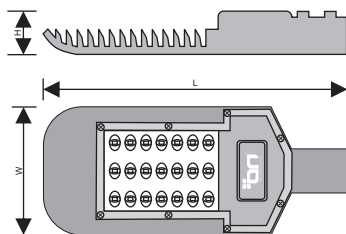

Wattage	Length (L)	Width (W)	Height (H)	Pipe Dia (Ø)
20 W	305 mm	115 mm	45 mm	38 mm
30 W	360 mm	125 mm	45 mm	38 mm
50 W	410 mm	160 mm	50 mm	38 mm
100 W	630 mm	220 mm	75 mm	60 mm



### Applications



\*Lumen for 6500K (CW)






# HECTOR LED FLOOD LIGHT




High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management  
 Color options: CW, WW



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
125 W	FLH 125W	110-240	CW / WW	>15000 lm
250 W	FLH 250W	110-240	CW / WW	>30000 lm
350 W	FLH 350W	110-240	CW / WW	>42000 lm
500 W	FLH 500W	110-240	CW / WW	>60000 lm

## Dimensions

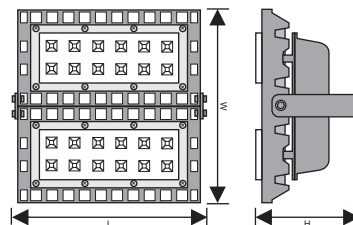

Wattage	Length (L)	Width (W)	Height (H)
125 W	204 mm	230 mm	215 mm
250 W	408 mm	230 mm	215 mm
350 W	408 mm	345 mm	215 mm
500 W	408 mm	460 mm	215 mm

## Applications



STADIUM



STORAGE AREA



GARDEN



INDUSTRIES



\*Lumen for 6500K (CW)

# ALTIMA


## LED SPIKER LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available color options: ■ Green,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
12 W	ASL 12W	110-240	CW / NW / WW	>1200 lm
18 W	ASL 18W	110-240	CW / NW / WW	>1800 lm

### Dimensions

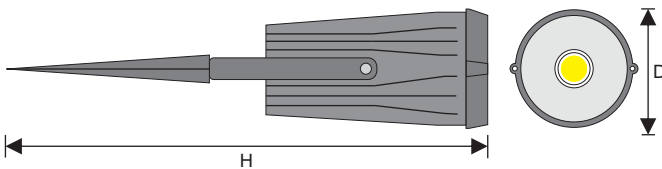

Wattage	Dia (D)	Height (H)
12 W	65 mm	290 mm
18 W	65 mm	290 mm



### Applications



\*Lumen for 6500K (CW)





# ZETTA LED FOOT LIGHT


High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,

Alluminium body for better thermal management

Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattge	Order Code	Supply (Vac)	Colors (CCT)	Lumens
3 W	ZFL 3W	110-240	CW / NW / WW	>300 lm
6 W	ZFL 6W	110-240	CW / NW / WW	>600 lm

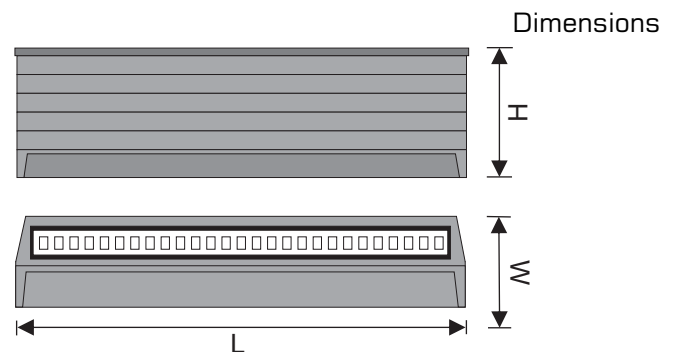

Wattage	Length (L)	Width (W)	Height (H)
3 W	80 mm	70 mm	40 mm
6 W	150 mm	70 mm	40 mm

### Applications



\*Lumen for 6500K (CW)

# JUMER


## LED JUMER LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body for better thermal management,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
50 W	ZMR 50W	110-240	CW / NW / WW	>5000 lm
100 W	ZMR 100W	110-240	CW / NW / WW	>10000 lm

### Dimensions

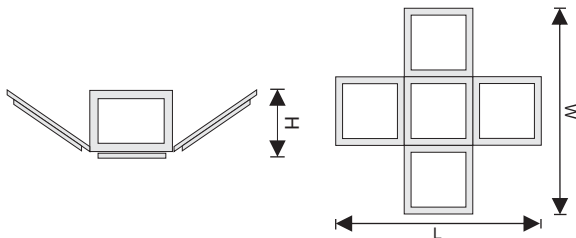

Wattage	Length (L)	Width (W)	Height (H)
50 W	350 mm	350 mm	75 mm
100 W	350 mm	350 mm	75 mm



### Applications



\*Lumen for 6500K (CW)



# SHINE LED WELLGLASS LIGHT




High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium body with clear / milky white diffuser,  
 Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
27 W	WG 27W	110-240	CW / NW / WW	>2700 lm
40 W	WG 40W	110-240	CW / NW / WW	>4000 lm
50 W	WG 50W	110-240	CW / NW / WW	>5000 lm
70 W	WG 70W	110-240	CW / NW / WW	>7000 lm
100 W	WG 100W	110-240	CW / NW / WW	>10000 lm

## Dimensions

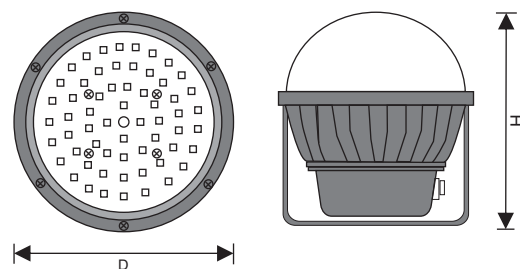

Wattage	Dia (D)	Height (H)
27 W	158 mm	90 mm
40-50 W	158 mm	90 mm
70-100 W	215 mm	240 mm

## Applications



\*Lumen for 6500K (CW)







# UFO


## LED HIGH BAY LIGHT

High luminous efficacy,  
 Lm80 tested LED Technology for long Life span,  
 High Performance LED Driver,  
 Power Factor > 0.9,  
 Thd < 15%,  
 Aluminium Body for better thermal management,  
 Available Color options: CW, NW, WW,



Wattage	Order Code	Supply (Vac)	Color (CCT)	Lumens
60 W	HBU 60W	110-240	CW / NW / WW	>6000 lm
100 W	HBU 100W	110-240	CW / NW / WW	>10000 lm
150 W	HBU 150W	110-240	CW / NW / WW	>15000 lm
200 W	HBU 200W	110-240	CW / WW	>24000 lm
250 W	HBU 250 W	110-240	CW / WW	>30000 lm

### Dimensions

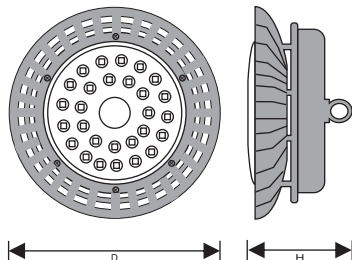

Wattage	Dia (D)	Height (H)
60 W	200 mm	165 mm
100 W	295 mm	180 mm
150 W	295 mm	180 mm
200 W	395 mm	180 mm
250 W	395 mm	180 mm



### Applications



\*Lumen for 6500K (CW)



# FIN LED HIGH BAY LIGHT




High luminous efficacy,  
Lm80 tested LED Technology for long Life span,  
High Performance LED Driver,  
Power Factor > 0.9,  
Thd < 15%,  
Aluminium body for better thermal management

Available color options: ■ Red, ■ Green, ■ Blue, ■ Pink,



Wattage	Order Code	Supply (Vac)	Colors (CCT)	Lumens
50 W	HBF 50W	110-240	CW / NW / WW	>5000 lm
100 W	HBF 100W	110-240	CW / NW / WW	>10000 lm
150 W	HBF 150W	110-240	CW / NW / WW	>15000 lm
200 W	HBF 200W	110-240	CW / NW / WW	>20000 lm
250 W	HBF 250W	110-240	CW / NW / WW	>25000 lm

## Dimensions

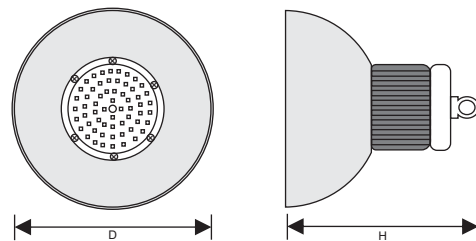

Wattage	Dia (D)	Height (H)
50 W	345 mm	280 mm
100 W	345 mm	290 mm
150 W	425 mm	360 mm
200 W	475 mm	370 mm
250 W	475 mm	370 mm

## Applications



\*Lumen for 6500K (CW)





## **BN LED LIGHTS PVT. LTD.**

At. Lothada, Dist. Rajkot (Gujarat) India.

Call : + 91-82381 66866

For Trade Enquiry / Customer Feedback :

Cust. Care : +91-82382 66866

sales@bnledlights.com  
www.bnledlights.com

